
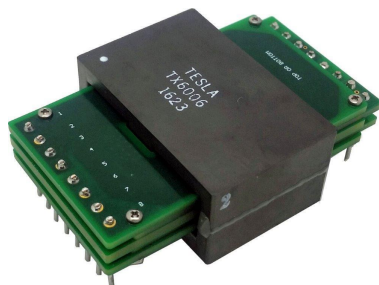
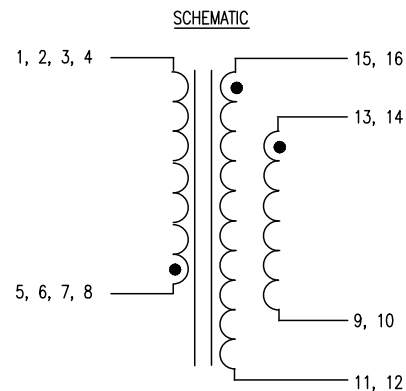
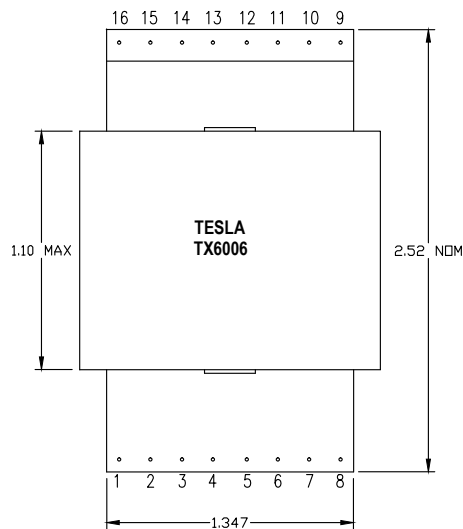
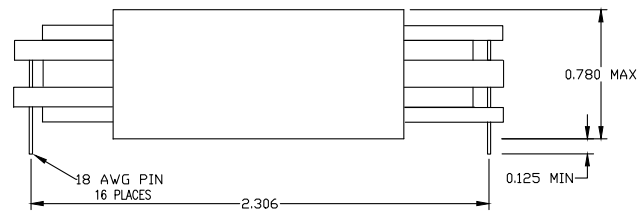


## LOW PROFILE 750W TRANSFORMER TX6006



### ELECTRICAL SPECIFICATIONS:

#### 1.0 TURNS RATIO: 1V 10 KHz

$$\frac{15,16 - 11,12}{1,2,3,4 - 5,6,7,8} : 1.70 \text{ TO } 1.80$$

$$\frac{13,14 - 9,10}{1,2,3,4 - 5,6,7,8} : 1.70 \text{ TO } 1.80$$

#### 2.0 INDUCTANCE: 0.1V 10 KHz

$$1,2,3,4 - 5,6,7,8 : 120 \mu\text{H MIN.}$$

#### 3.0 D.C. RESISTANCE: 25 C

$$1,2,3,4 - 5,6,7,8 : 0.006 \text{ OHMS MAX}$$

$$15,16 - 11,12 : 0.020 \text{ OHMS NOM}$$

$$13,14 - 9,10 : 0.020 \text{ OHMS NOM}$$

#### 4.0 LEAKAGE INDUCTANCE: 0.1V 1 MHz

$$1,2,3,4 - 5,6,7,8 : 50 \text{ nH MAX.}$$

WITH 9,19,11,12,13,14,15,16 SH

### STANDARD DIMENSION TOLERANCE (INCHES)

.X	
.XX	±0.02
.XX	±0.005