



1000W PLANAR BOOST INDUCTOR TX6003

ELECTRICAL SPECIFICATIONS:





1.0 INDUCTANCE: 0.1V 10 KHz

1,2,3,4 – 5,6,7,8 : 50 uH MIN. @ 0Adc 1Vrms, 100KHz
 1,2,3,4 – 5,6,7,8 : 40 uH MIN. @ 21Adc 1Vrms, 100KHz

2.0 D.C. RESISTANCE: 25°C

1,2,3,4 – 5,6,7,8 : 0.010 Ω MAX

SCHEMATIC

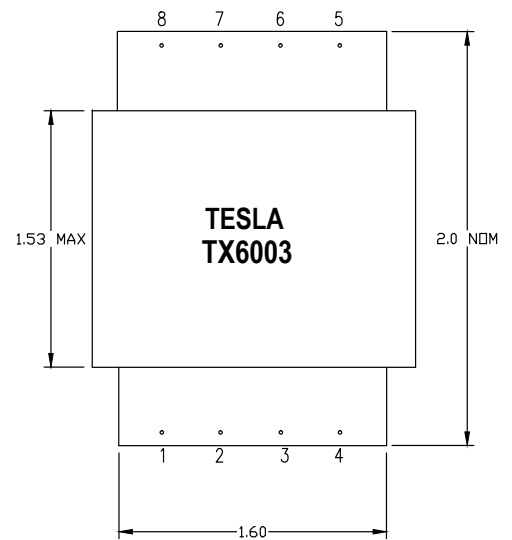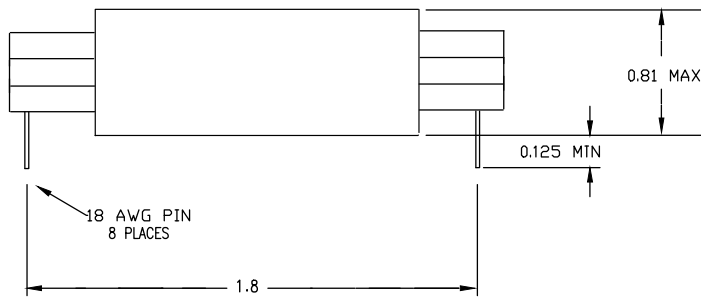

STANDARD DIMENSION TOLERANCE (INCHES)

.x	/
.xx	±0.02
.xx	±0.005